


# ADSS-09G652XXX-SJ200-IN

All-media Self-supporting, MDPE Single Sheath, (G652D), Multi Loose Tube Design, ADSS Optical Cable

April 2022

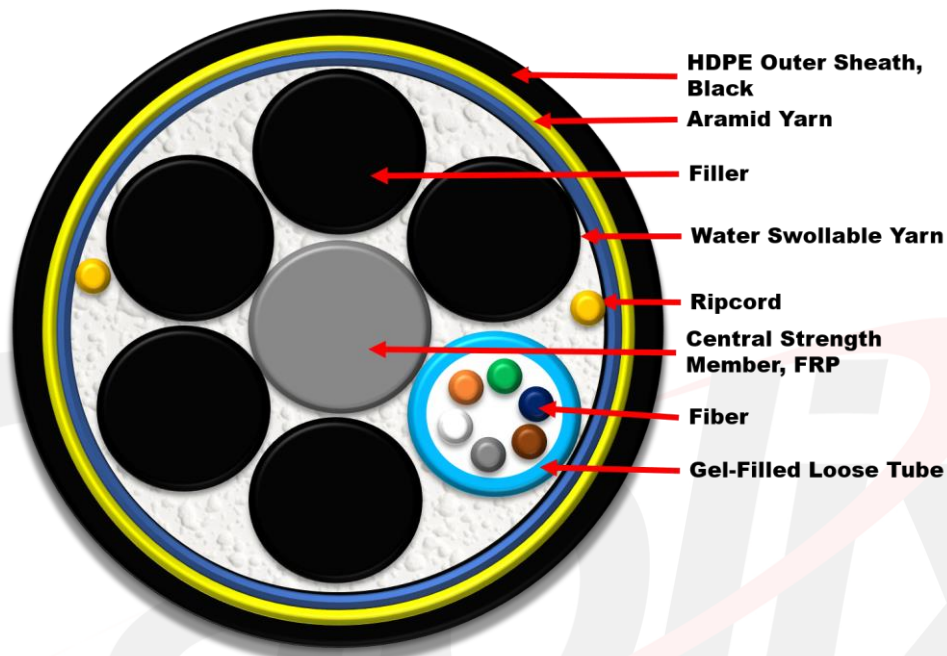

All dielectric self supporting aerial optic cable containing up to 144 LWP-SMF in full compliance with ITU-T G 652D. The offered cables are fully compliant to the relevant IEC specifications.

## CABLE DESIGN

- Up to 144 enhance low water peak single mode fibers in full compliance with ITU-T-G652D
- Non-metallic and anti-buckling element FRP rod used as Central Strength Member
- Loose buffer tubes fully filled
- Loose buffer tubes S-Z Stranded
- S-Z core is dry type filled with water swellable yarn & tape
- High Modulus, Aramid yarn as peripheral strength member
- UV Stabilized, PE Outer sheath, black

## APPLICATION

- Single layer stranded construction
- Offers exceptional strength and corrosion resistance for aerial application
- Flexible buffer tubes provide easy fiber routing inside closure
- All dielectric ant rodent construction

Fiber/Tube Identification/											
Buffer Tube Color											
1	2	3	4	5		7	8	9	10	11	12



# ADSS-09G652XXX-SJ200-IN

All-media Self-supporting, MDPE Single Sheath, (G652D), Multi Loose Tube Design, ADSS Optical Cable

## CABLE PHYSICAL CHARACTERISTICS

Fibre Count	6	12	24	48	96	144
Number of Fibres in Each Micro Modules	6	12				
Number of Buffer Tubes in each cable	1+5	1+5	2+4	4+2	8	12
Cable Diameter (mm)	10.3	10.3	10.3	10.4	12.8	15.0
Tolerance ± (mm)	0.5	0.5	0.5	0.5	0.5	0.5
Nominal Cable Weight (kg/km)	80	80	80	85	115	175
Standard Length (meters)	4000 ± 5%					

## CABLE MECHANICAL & ENVIRONMENTAL CHARACTERISTICS

Test	Standard	Product Performance											
Temperature Range (°C)	[IEC 60794-1-2-F1]	Operation: -40 °C to +70 °C, Installation: -5 °C to +45 °C & Storage: -40 °C to +70 °C											
Cable Bending Radius (mm)	[IEC 60794-1-2-E11 A & B]	206	206	208	256	256	300						
Kink Resistance (mm)	[IEC 60794-1-2-E10]	103	103	104	128	128	150						
Tensile Force (N)	[IEC 60794-1-2-E1]	3200	3200	3200	3200	3900	4500						
Impact Resistance (Nm)	[IEC 60794-1-2-E4]	5	5	5	5	5	5						
Crush Resistance (N)	[IEC 60794-1-2-E3]	2000	2000	2000	2000	2000	2000						
Torsion Resistance	[IEC 60794-1-2-E7]	10 Cycle, ± 180°, L=100N											
Water Penetration	[IEC 60794-1-2-F5 B]	1 Meter Water Head, 3 Meters Cable Sample, 168 Hours											
<b>Note: After the Test, Change in Attenuation shall be ≤ 0.05 dB/Km. No Fibre Break &amp; Damage or Crack on the Cable</b>													

## CABLE TRANSMISSION CHARACTERISTICS

Fibre Type	Attenuation Coefficient (dB/Km)	PMD				Cable Cut-Off	MFD	
		850	1300	1310	1550			ps/sqrt.km
Single Mode	G.652D	-	-	≤ 0.36	≤ 0.23	≤ 0.2	≤ 1260	9.2 ± 0.4
Single Mode	G.657A1	-	-	≤ 0.36	≤ 0.23	≤ 0.2	≤ 1260	8.8 ± 0.4
Multi Mode	50 micron							

## APPLICATIONS

FTTH access network / Telecommunication Networks / CATV Networks / Data communications Networks / Local Area Networks




STREET



HOSPITAL



INDUSTRIES



FTTH



OTHERS

Cable Fitting  
Optic Cables  
Optic Tools  
Fiber Patch Panel  
Fiber Protection  
Fiber Cassette  
Fiber Connectivity  
Fiber Box